

ELECTROMAGNETIC LOCKS



High Strength Material



Design without Mechanical Failure




Suitable For Wooden Door,
Glass Door, Metal Door, Fireproof Door.



ZDL-280 series DC12V/DC24

280/280W/280C/280CF/280B/280S

280T/280ST/280D/280DS/280DT/280DST

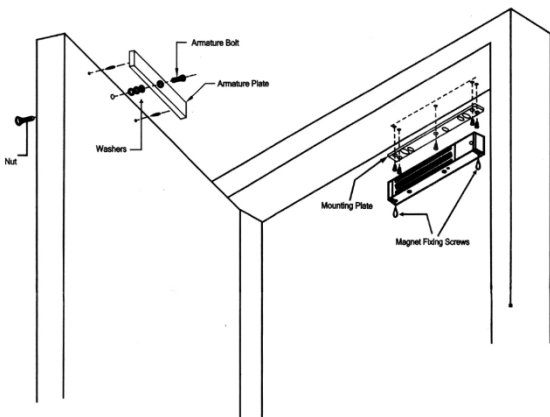

With door state detection signal output function, for applications that require real-time monitoring of entrance door switch state occasions; NO /NC /COM, NO output when locking and unlocking the NC output. With adjustable delay locked 0-20 seconds unlock when there is no electricity.

- Input voltage : DC12V, or DC24(can be customized)
- Holding Force: 280Kg(600Lbs)
- Instant release, no hysteresis
- No residual magnetism Designed
- High Strength Material, Anodized Aluminum Housing.
- Design without Mechanical Failure.
- Suitable For Wooden Door,Glass Door,
- Metal Door, Fireproof Door.

- Bi-color LED to achieve opening and closing status display
- Fail-safe type (Power to lock): Power-on to lock, Power-off to open).
- Suitable for: Wooden door, Glass door, Metal door, Fireproof door
- Finishes for Shell: Anodized aluminums
- Finishes for Magnetic: Zinc
- Finishes for Armature: Zinc

www.zudsec.com

A3 Building A area, BaoYing Industrial Park, Wulian Road, LongGang District, Shenzhen, China P.C.: 518116

Business Cooperation: info@zudsec.com; Technical Support: techsupport@zudsec.com

Instant Messenger: ZUDEN TECHNOLOGY (CHINA)(图1) Skype: [zudensecurity](https://www.skype.com/partners/zudsec)



Model	ZDL-280	ZDL-280W	ZDL-280C	ZDL-280CF
Lock Size	250x48x27mm	250x48x27mm	228x38x28mm	258x42x28mm
Holding Force	280kg(600lbs)	280kg(600lbs)	280kg(600lbs)	280kg(600lbs)
Working Voltage	DC12V/DC24V	DC12V/DC24V	DC12V/DC24V	DC12V/DC24V
Working Current	350mAx2/175mA	350mAx2/175mA	350mAx2/175mA	350mAx2/175mA
Fail Safe	LED	LED (Waterproof)	-	-
Weight	2kg	2kg	1.9kg	2kg



Model	ZDL-280B	ZDL-280S	ZDL-280T	ZDL-280ST
Lock Size	250x48x27mm	250x48x27mm	250x48x27mm	250x48x27mm
Holding Force	280kg(600lbs)	280kg(600lbs)	280kg(600lbs)	280kg(600lbs)
Working Voltage	DC12V/DC24V	DC12V/DC24V	DC12V/DC24V	DC12V/DC24V
Working Current	350mAx2/175mA	350mAx2/175mA	350mAx2/175mA	350mAx2/175mA
Fail Safe	LED, Buzzer alarm	LED, NO/NC/COM	LED, Time-Delay	LED, Time-Delay, NO/NC/COM
Weight	2kg	2kg	2kg	2kg



Model	ZDL-280D	ZDL-280DS	ZDL-280DT	ZDL-280DST
Lock Size	500x48x27mm	500x48x27mm	500x48x27mm	500x48x27mm
Holding Force	280kgx2(600lbsx2)	280kgx2(600lbsx2)	280kgx2(600lbsx2)	280kgx2(600lbsx2)
Working Voltage	DC12V/DC24V	DC12V/DC24V	DC12V/DC24V	DC12V/DC24V
Working Current	350mAx2/175mAx2	350mAx2/175mAx2	350mAx2/175mAx2	350mAx2/175mAx2
Fail Safe	LED	LED, NO/NC/COM	LED, Time-Delay	LED, Time-Delay, NO/NC/COM
Weight	4kg	4kg	4kg	4kg

